


ESSENSA

FLOORING FORWARD

CLICK



ESV003-02 Ferro

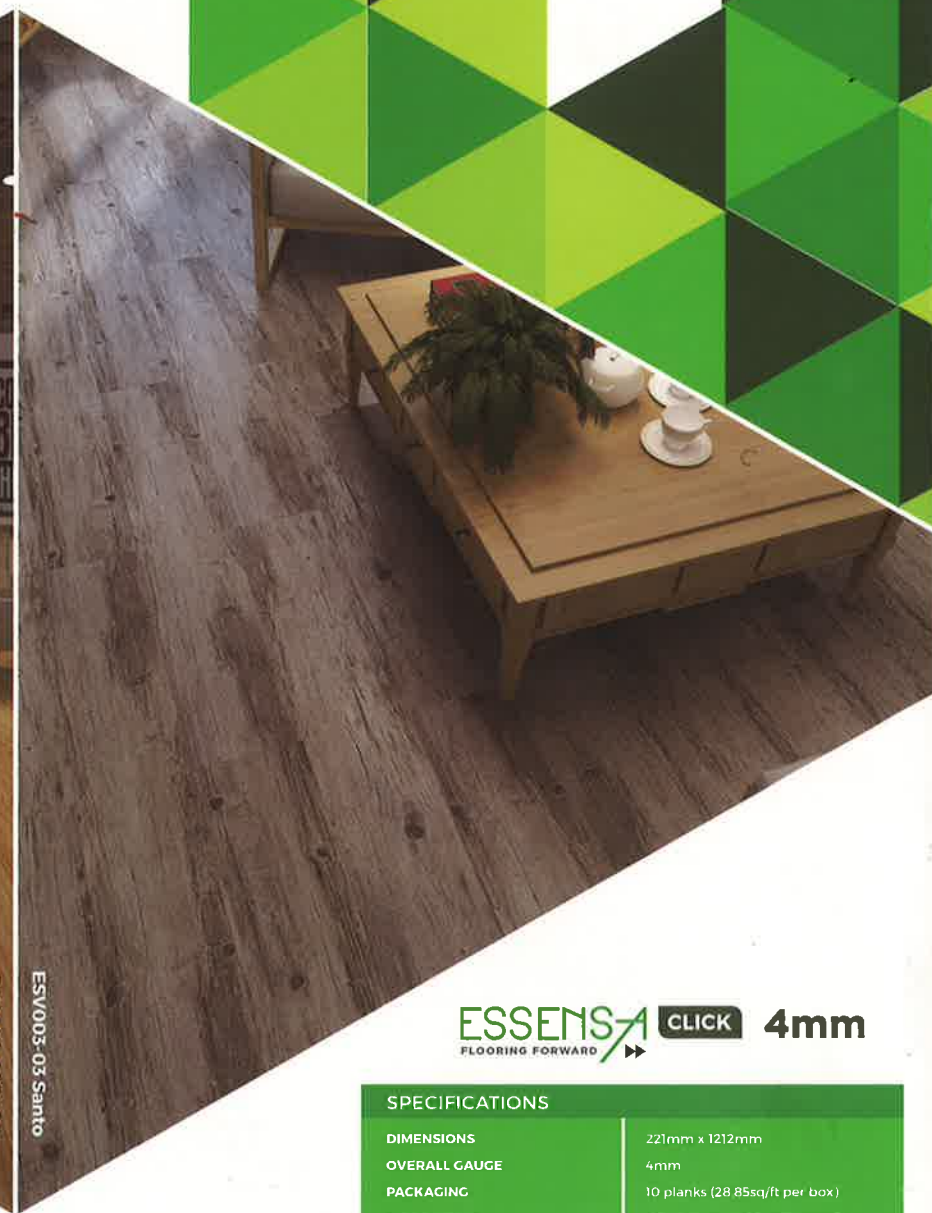

ESV003-03 Santo

ESSENSA CLICK 4mm

SPECIFICATIONS

DIMENSIONS	221mm x 1212mm
OVERALL GAUGE	4mm
PACKAGING	10 planks (28.85sq/ft per box)
WEAR LAYER	Triple FadeGuard UV Protection

ENVIRONMENTAL



DURABILITY



CERTIFICATION & WARRANTIES



PERFORMANCE



PERFORMANCE

CHARACTERISTICS	Test Method	Test Result
Chemical Resistance	EN423 93	Pass Class 0
Castor Resistance	EN425 94	25,000 Cycles. No Visible Damage
Dimensional Squareness & Straightness	EN427 94	Pass
Total Thickness	EN428 93	Pass - Accurate to 4mm
Residual Indentation after Static Load	EN433 94	Pass - No visible indentation
Dimensional Stability & Curling after Exposure to Heat	EN434 94	Pass
Shrinkage Rate		< 0.25%
Curling		< 2mm
Flexibility	EN435 94 (A1)	Pass
	Bend around 20mm	
	Mandrel shows no signs of cracking	
Abrasion Resistance	EN660 1/2	Pass - 0.1% loss
Color Fastness to Light	EN20 ISO105 B02	Pass - Greater Than Level 6
Specific Gravity	ASTM D792 91	Pass - Density Intact
Coefficients of Friction	ASTM D1894 01	Pass - Values Within Limits
Flammability	B1	Pass - Rate of Flame Spread Within Limits

All trademarks indicated in this publication are property of their respective owners. Information and specifications contained herein are accurate at the time of printing and may change without notice. All images are for illustration purposes only and colours of actual product may differ from the images contained herein.

www.essensafloors.com

MADE IN ASIA



ESV003-01 meranti



ESV003-02 ferro



ESV003-03 santo



ESV003-04 jatoba